



Pattern RLS.01 - Stack Bond

600x600mm (B) - 2.78 per sq.m.

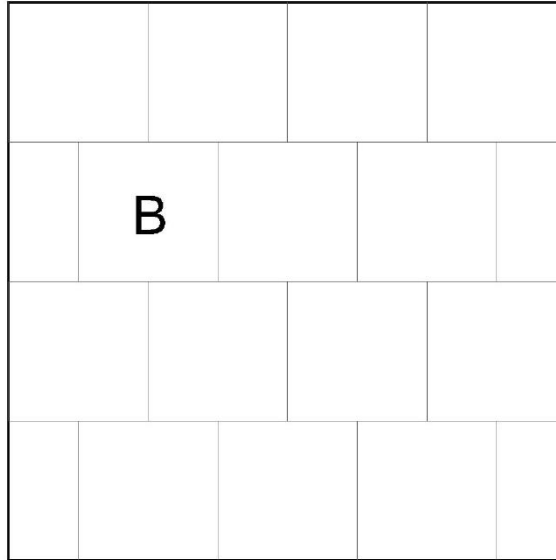


Pattern RLS.02 - Running Bond

600x600mm (B) - 2.78 per sq.m.

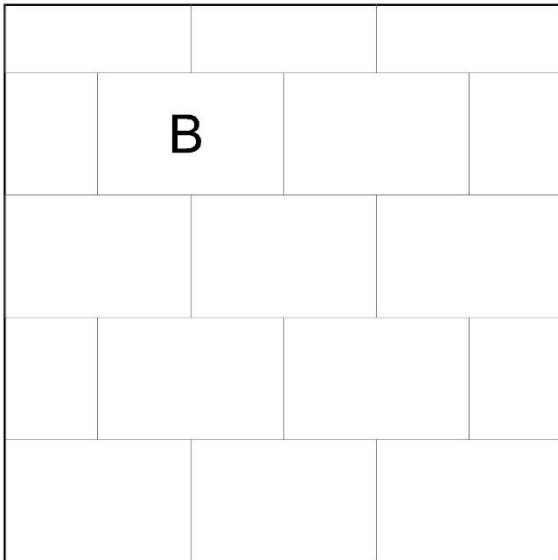

Pattern RLS.03 - Running Bond


900x600mm (D) - 1.85 per sq.m.

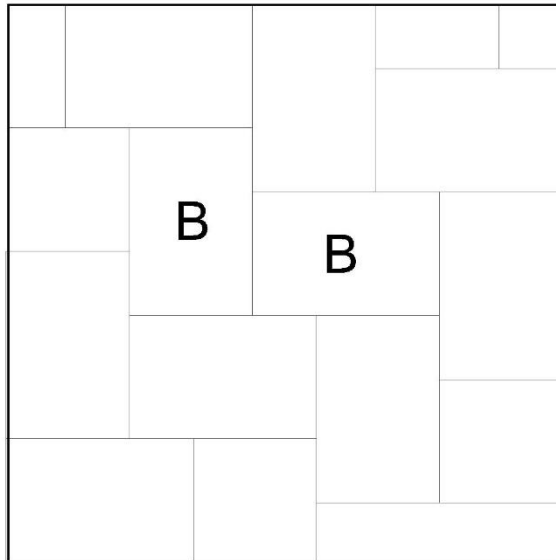

Pattern RLS.04 - Herringbone

900x600mm (D) - 1.85 per sq.m.

All block statistics per sq.m. could potentially be rounded up to the nearest whole unit. When multiplied over a large area to get an overall volume it can result in a small excess being incurred. Generally for CBP quantities an extra of approx. 10% is suggested to account for natural wastage and cutting. Brett Landscaping cannot be held responsible for any excess or shortfall of units resulting from these statistics.

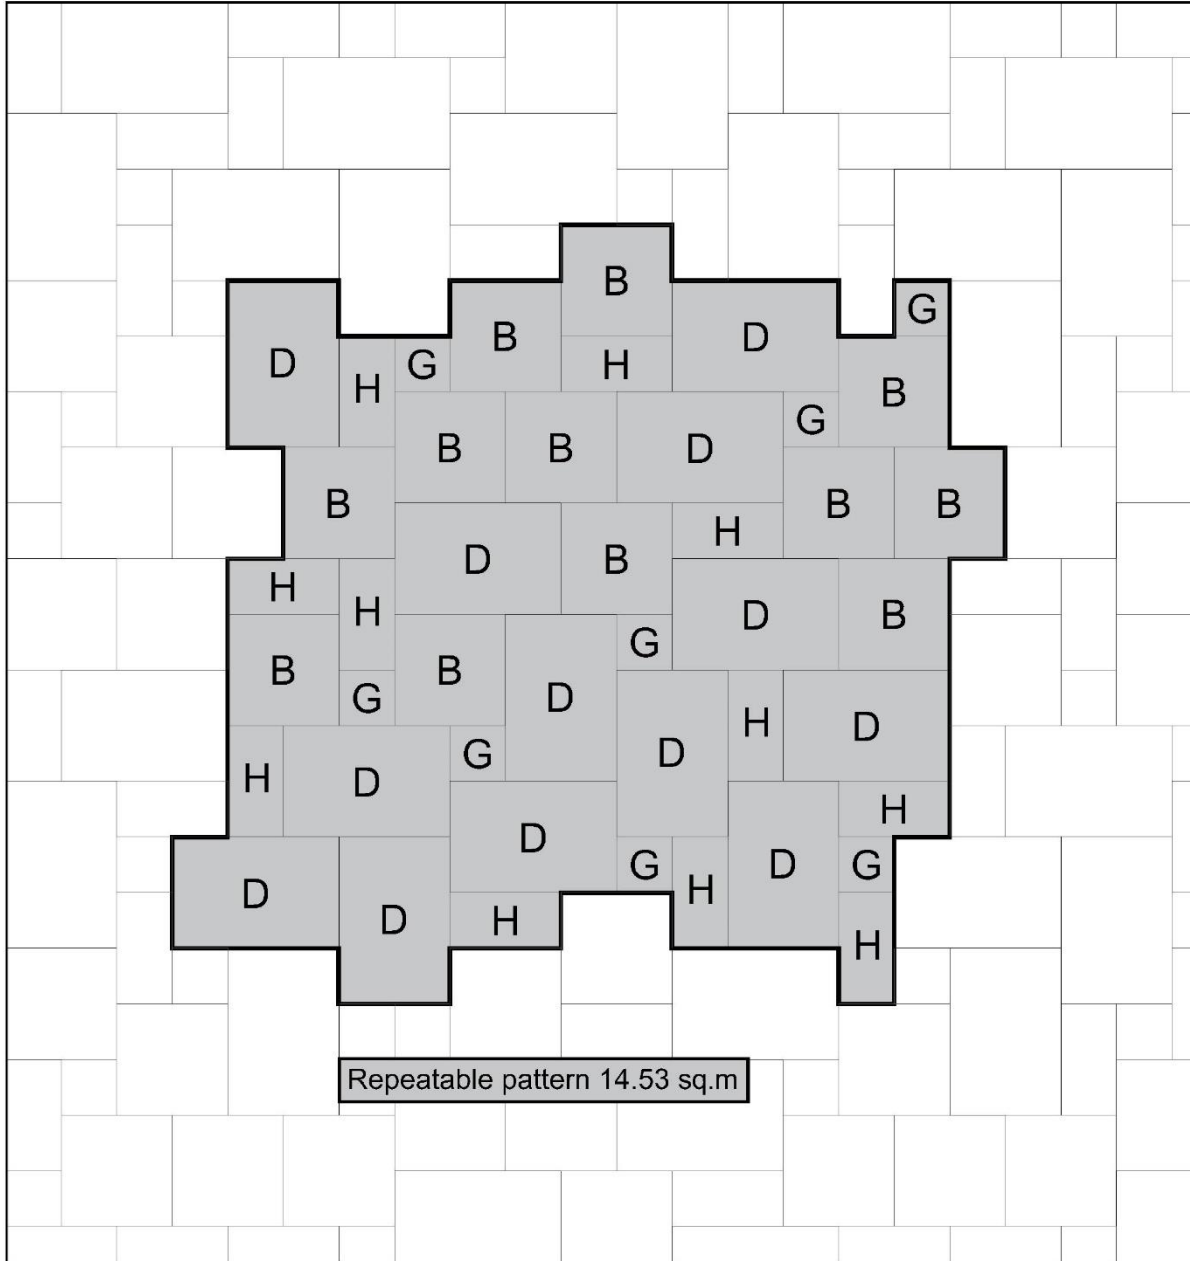

Pattern RLP.01 - Random 5 Size

12 No. - (B) 600x600mm per repeat 13 No. - (D) 900x600mm per repeat 11 No. - (H) 600x300mm per repeat

8 No. - (G) 300x300mm per repeat

Nominal 10mm joint width included in coverage sq.m

All block statistics per sq.m. could potentially be rounded up to the nearest whole unit. When multiplied over a large area to get an overall volume it can result in a small excess being incurred. Generally for CBP quantities an extra of approx. 10% is suggested to account for natural wastage and cutting. Brett Landscaping cannot be held responsible for any excess or shortfall of units resulting from these statistics.